



GPS

# 3303DPX


Fully programmable power supply with real-time wave display bringing a new experience to the user

The GPS-3303DPX gives the user full control over output with three independently controlled channels. Two channels can be used in series or parallel to create one output allowing for extended usability and application. All channels are fully isolated and are capable of generating a total of 220W. Each output has short-circuit and overload protection, and an intelligent temperature-controlled fan reduces operational noise. The large graphical display allows for clear setting and programming which are simply adjusted using the intelligible front panel dials and button options. In addition, the power supply can be remotely operated using the LAN interface and PC connectivity. Generate highly accurate levels of voltage and current with this fully programmable power supply.



## Key Features

- 4-digit voltage and 3-digit current display with minimum resolution of 10mV/10mA
- Supports panel timing output functions
- 4.3" true colour TFT-LCD display with resolution of 480 x 272 pixels
- Compatible with 100, 120, 220 and 230V installations
- Intelligent, temperature-controlled fan
- Store and recall 5 setup options
- Easypower© software /supports SCPI / LabVIEW driver

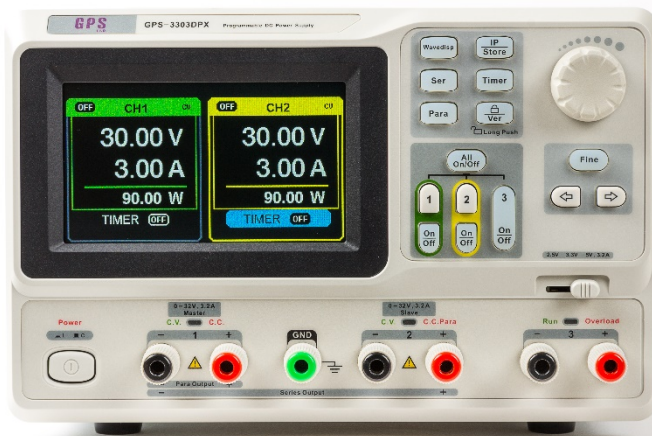

www.gpslimited.com/3303DPX  
 For all enquiries, Tel: +44 (0) 208 964 3600  
 Email: info@gpslimited.com

## Technical Specifications

<b>Model</b>	<b>GP-3303DPX</b>
Channels	CH1: DC voltage range: 0-30V, DC current range: 0-3A CH2: DC voltage range: 0-30V, DC current range: 0-3A CH3: DC voltage range: 2.5/3.3/5.0V, DC current range: 0-3A
Max output power	195W
Resolution	10mV / 10mA
Display digits	4.3 inches TFT-LCD display 4-digits voltage 3-digits current
Ripple noise	CV/CH3: $\leq 1\text{mVrms}$ (5Hz-1MHz) CC: $\leq 3\text{mA rms}$
Standard interface	USB Device, LAN

### Standard Accessories

EasyPower© software  
USB cable  
Output test cords (Qty 2); mains power cord  
Calibration Certificate  
Product Certificate

### Power

AC 100V/120V/220V/230V  $\pm 10\%$  50/60Hz

### Insulation

Case to Terminal  $\geq 20\text{M}\Omega$  (DC 500V)  
Case to AC line  $\geq 30\text{M}\Omega$  (DC 500V)

### Safety

TÜV SÜD NRTL (UL CAN/CSA 61010-1)

## General Specifications

Part Numbers / Optional Accessories		
Code	Item	Part Number
GPS-3303DPX	Precision three-way power independently controllable power supply	590330

### Dimensions

225 x 278 x 143mm / 9 x 11 x 6" (w x d x h) approx.

### Mass

8.0kg/17.6lbs approx.

### Operating

0°C ~ 40°C  
Relative humidity  $\leq 80\%$   
 $\leq 2000\text{m}$   
Installation Level: II  
Pollution Level: 2

### Storage

-10°C ~ 70°C  
Relative humidity  $\leq 70\%$

### Services

1-year warranty (subject to product registration with GPS Ltd)

Visit [www.gpslimited.com/register-product](http://www.gpslimited.com/register-product)  
Service and calibration available.

Please contact for more information

## İLTEK TEKNOLOJİ LTD. ŞTİ.

İLTEK Anayurt Güvenlik Sistemleri Savunma Teknolojileri  
Bilişim ve Elektronik Ticaret Ltd.Şti.

Tel: +90 312 440 42 85 Fax: +90 312 440 42 86

[info@iltekteknoloji.com.tr](mailto:info@iltekteknoloji.com.tr) / [www.iltekteknoloji.com.tr](http://www.iltekteknoloji.com.tr)

Adres: Hilal Mah. 687 Sokak . Boyner Apt. No: 3/7 Çankaya /  
ANKARA / TURKEY