


ESD Mat


## 14101 ESD mat

Antistatic mat is mainly made with antistatic/ conductive material and dissipating material of synthetic rubber. Often a 2mm thickness of a double-layer composite structure, the surface layer is about 0.5mm thick static dissipative layer, the bottom of the conductive layer is approximately 1.5mm thickness.

Customized size is available.



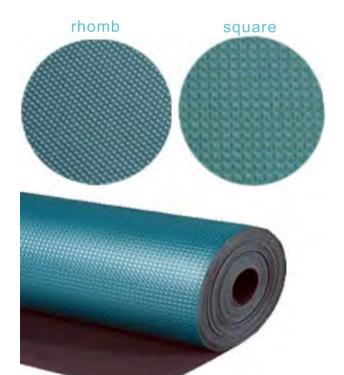



- Anti-shake, anti-fatigueInside net structure, resistance in average
- Surface resistance: 10^7-10^90hm
- Bottom resistance: 10^3-10^50hm
- Volume resistance: 10^5-10^8Ωcm static decay in short time, life more than 2 years
- · Shape of surface: square, rhomb





Material: Top layers: PVC; middle Layer: EPDM foamed; bottom layers: NBR/PVC Using advanced production technology, the surface resistance is 10<sup>3</sup>-10<sup>5</sup>Ω, permanently prevent static electricity Composite layer structure of an effective cushion foot pressure, alleviate fatigue

The surface with yellow warning side, naturally form anti-static protected areas


Clean and convenient, easy-to-move does not affect the normal working environment

Non-slip surface, acid and alkali resistant, safe to use Two 10mm buttons in the mat, grounding cord is available to connect

Standard size: 0.45mx0.6mx15mm/17mm 0.6mx0.9mx15mm/17mm (2layers/3layers) Standard width: 0.6m, 0.9m, 1.2m. The max width is 1.2m, and the max length is 20m

Standard thickness: 15mm, 17mm Color: black, yellow and black







- Using advanced production technology, the surface resistance is 10^3-10^5 $\Omega$ , permanently

- Using advanced production technology, the surface resistance is 10^3-10^5Ω, permand prevent static electricity
  Spherical design in its surface, anti-fatigue effect is better
  Clean and convenient, easy-to-move does not affect the normal working environment
  Non-slip surface, acid and alkali resistant, safe to use
  Standard size: 0.6mx0.9mx15mm
  Standard width: 0.6m, 0.9m, 1.2m. The max width is 1.2m, and the max length is 20m
  Standard thickness: 15mm
  Color: black

**ILTEK TEKNOLOJI LTD. ŞTİ.** 

İLTEK Anayurt Güvenlik Sistemleri Savunma Teknolojileri Bilişim ve Elektronik Ticaret Ltd.Şti. Tel: +90 312 440 42 85 Fax: +90 312 440 42 86

info@iltekteknoloji.com.tr / www.iltekteknoloji.com.tr Adres: Hilal Mah. 687 Sokak . Boyner Apt. No: 3/7 Çankaya / ANKARA / TURKEY

